



MaxCW25-Series

Full Servo Robot
IMM RANGE 1600 – 2400 Ton




MaxCW25-2500P	Standard		Metric	
Movement	Drive Type	Servo Telescoping Vertical Arm	Servo Telescoping Vertical Arm	Drive Type
IMM Range	US Tons	1600 - 2400	14234 - 21351	kN
Vertical Stroke	in	98.43	2500	mm
Single Arm Strip	in	72.44	1840	mm
Traverse	in	157.48	4000	mm
Gripper Angle	°	90	90	°
Max Load	lbs	66.14	30	kg
Weight	lbs	3673	1666	kg
Drive System	Drive	AC Servo Motor	AC Servo Motor	Drive
Working Air Pressure	psi	71.12 ~ 113.90	5 ~ 8	kg/cm ²
Air Consumption	Fluid oz	1.353E-07	4	NI/cycle
Max Amperage	Amps	13.6	13.6	I
Power Supply	Power Supply	480VAC - 3 Phase - 60 Hz	480VAC - 3 Phase - 60 Hz	Power Supply



MaxCW25-Series

Full Servo Robot
IMM RANGE 1600 – 2400 Ton

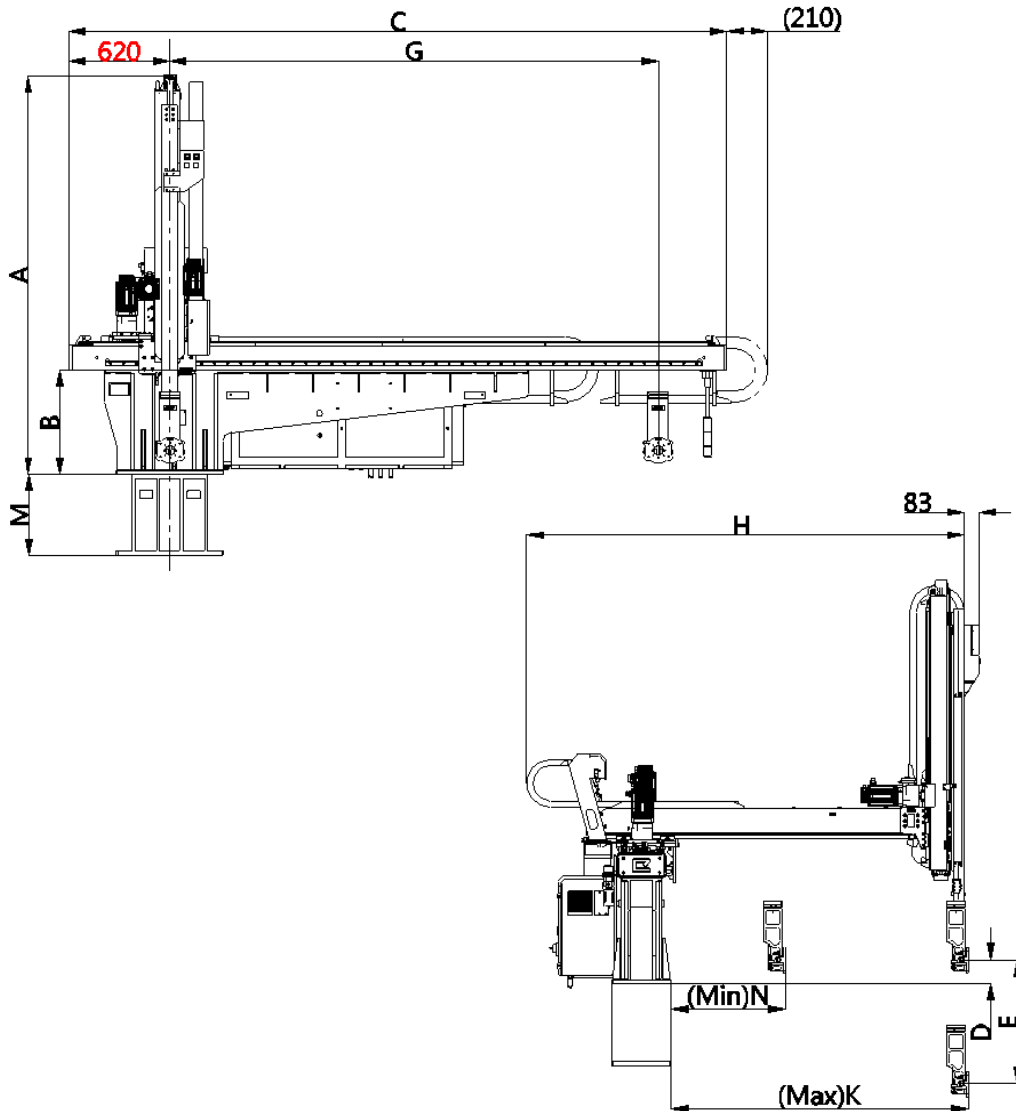

MaxCW25-2500P	Standard (in)	Metric (mm)
A	108.27	2750
B	25.59	650
C	198.43	5040
D	7.28	185
E	98.43	2500
G	157.48	4000
H	108.27	2750
K	72.44	1840
N	17.32	440
M	Custom	Custom

Specifications subject to change due to technical advances